




HGLRC F450 飞塔

说明书

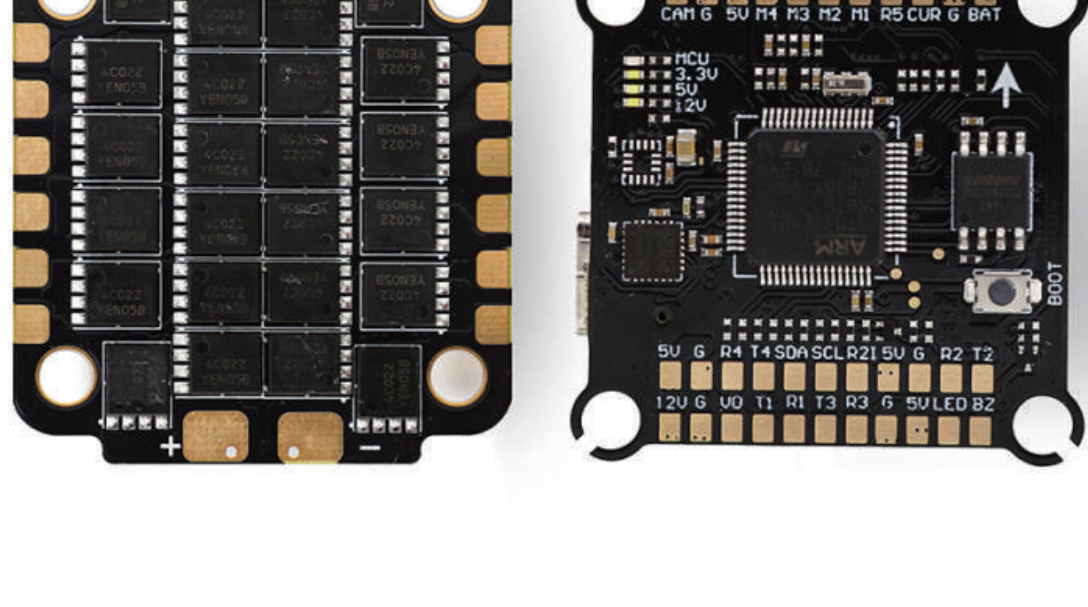

HGLRC F450 飞塔 使用指南



产品参数

SPECTER F405 飞控

MCU：STM32F405

GYRO：MPU6000

OSD：AT7456E

黑匣子：16MB

UART：5

BEC：10V2A/5V2.5A

飞控固件：SPEDIXF405

飞控尺寸：37mm*37mm*6mm

SPECTER 50A 电调

持续电流：50A

峰值电流：60A（10秒）


电调固件:BL_S 8位 (F-H-40 16.7)

电调尺寸：44mmx36mmx7mm

HGLRC SPECTER F450 飞塔 使用指南




接口定义

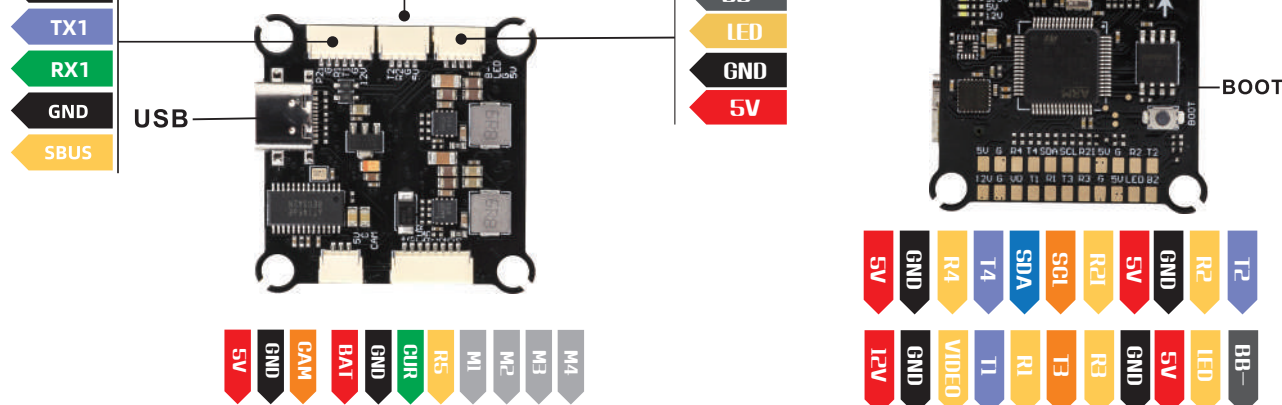

HGLRC SPECTER F450 飞塔 使用指南



接线图

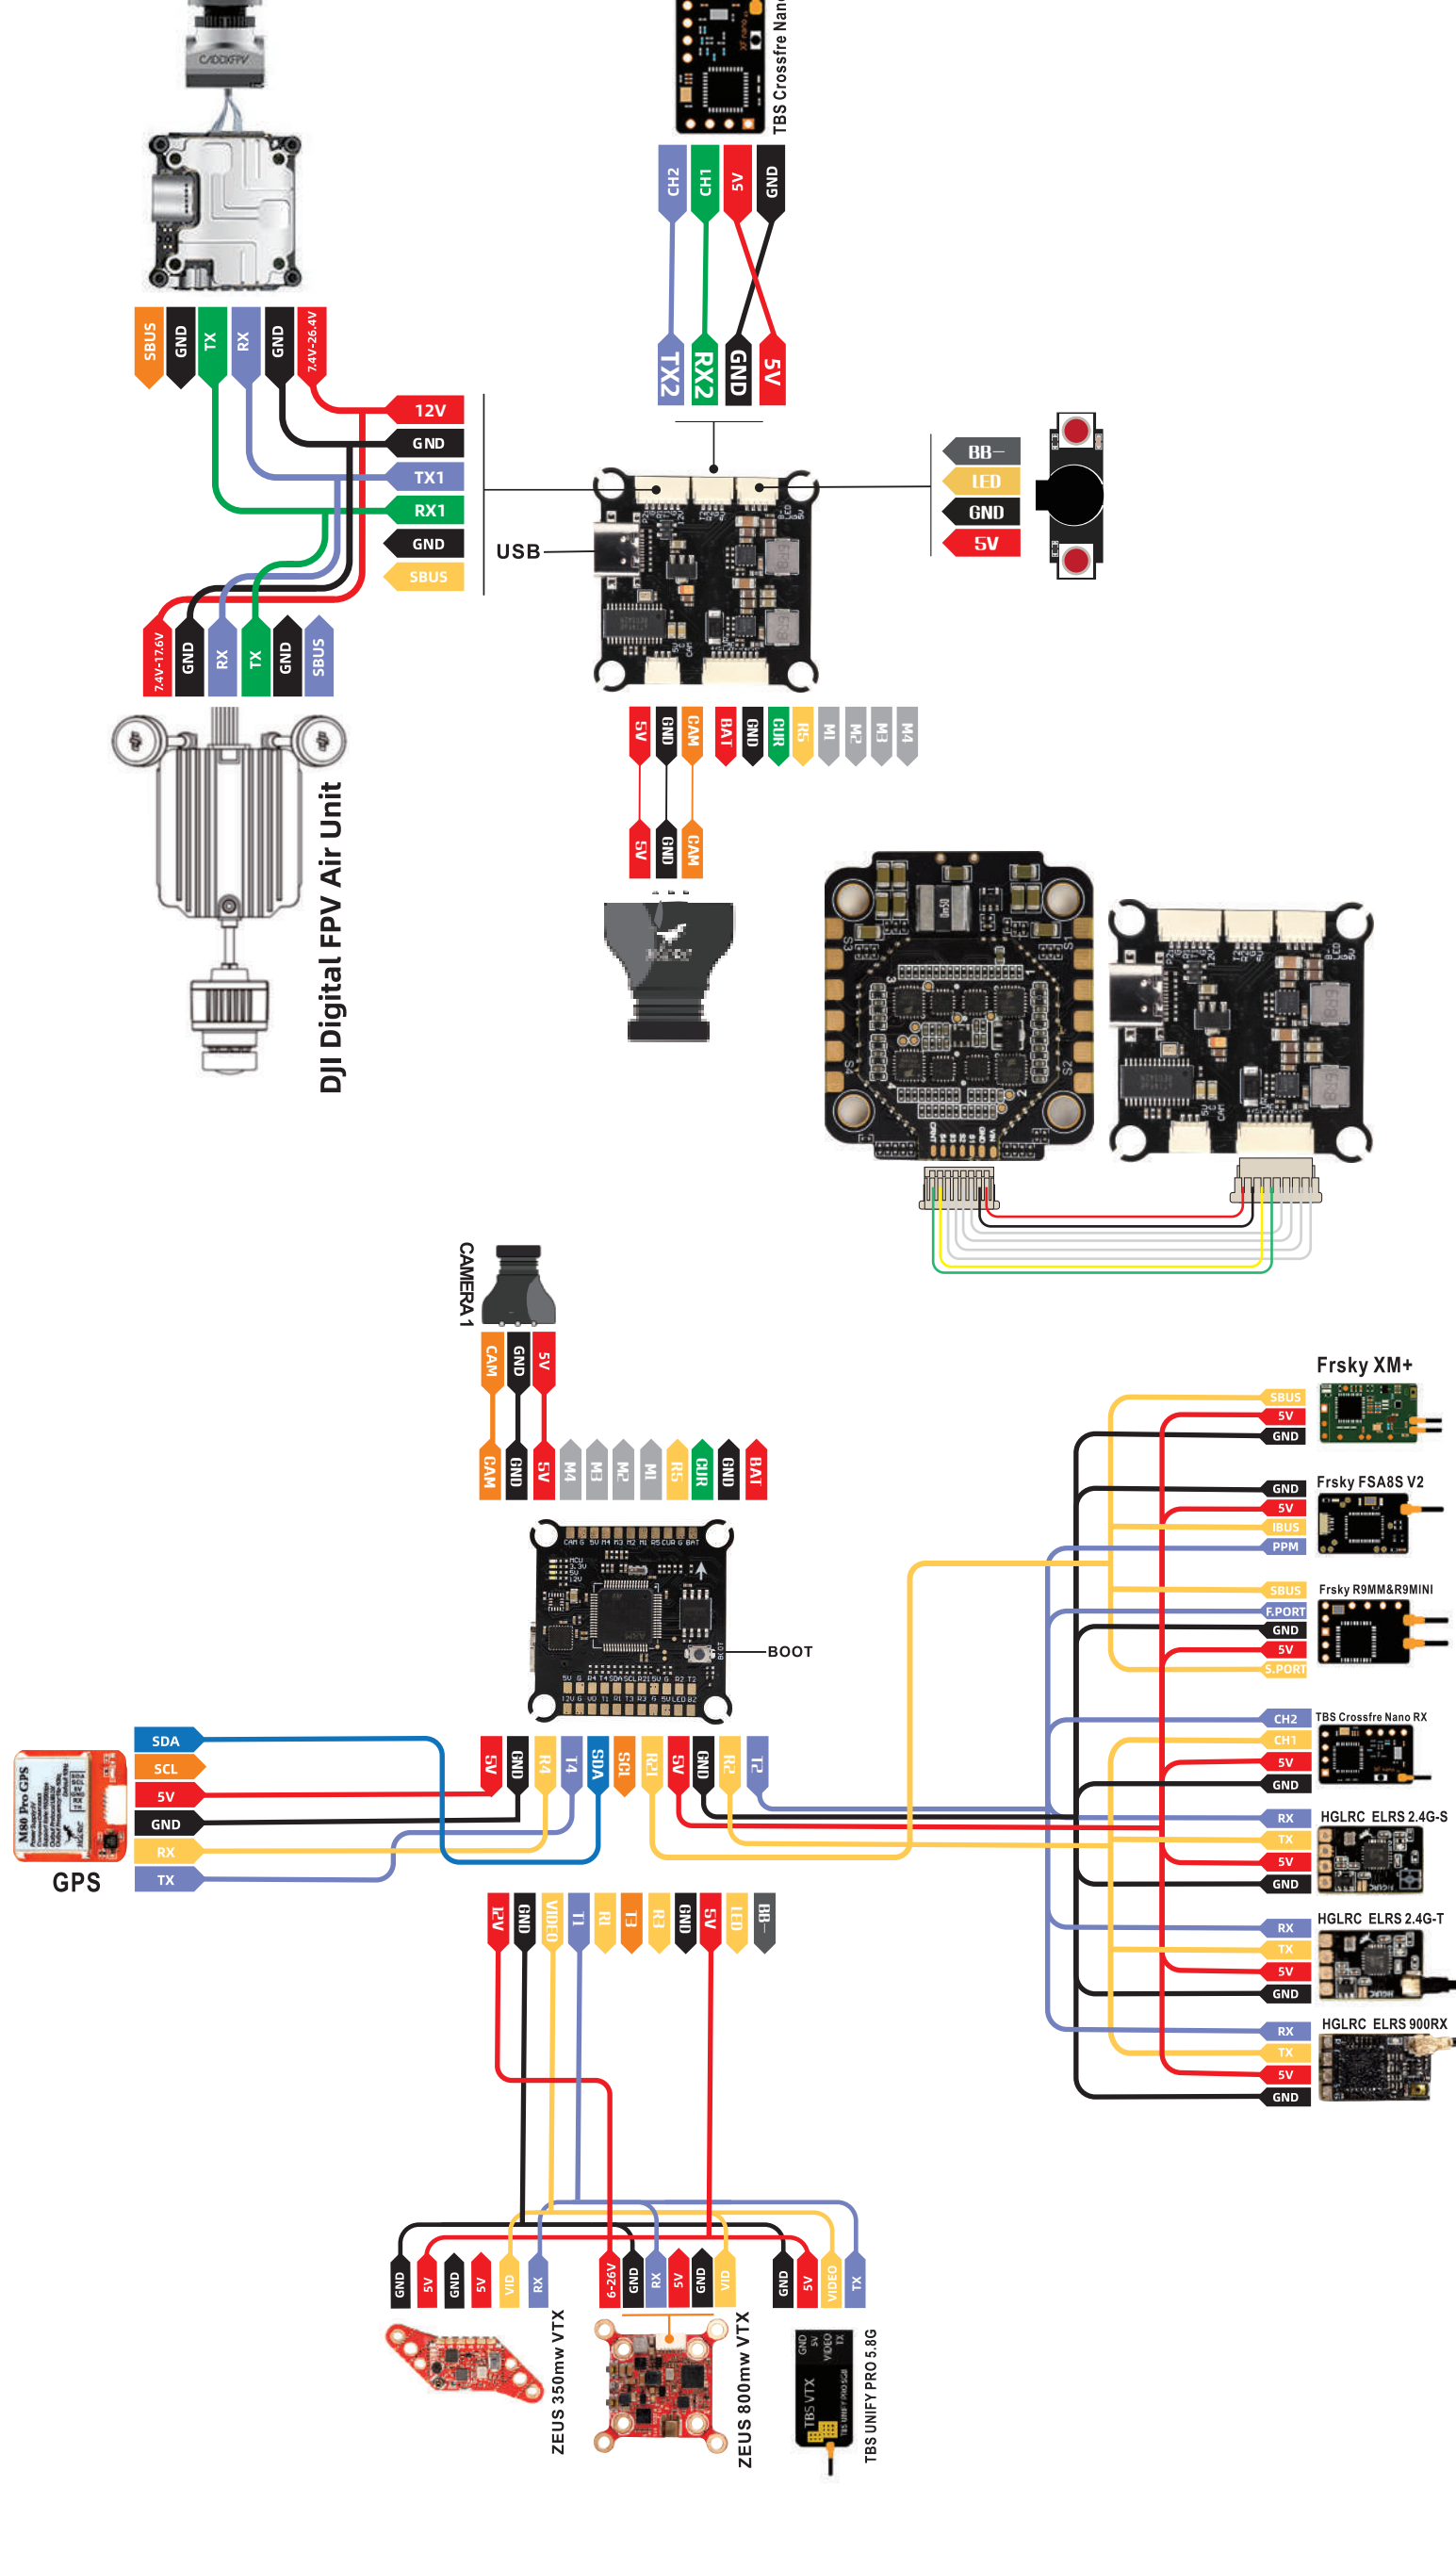

HGLRC SPECTER F450 飞塔 使用指南



关于售后

1. 收到产品后出现不能正常使用的情况请及时咨询售后客服或返厂检修，如经检测是产品问题我司将提供无偿维修或换新。
2. 如因操作不当造成产品损坏，经检查，在能修复的情况下，可提供维修服务。
3. 国内客户请联系售后服务人员。

公司信息

衷心感谢飞友的信任！欢迎选择化骨龙的产品




公司名称：广东化骨龙科技有限公司
技术电话：18033023851（微信同号）
官网网址：<https://hglrc.taobao.com>
地址：东莞市大朗镇银英路28号泓鑫泰产业园B1栋



HGLRC F450 STACK

Manual

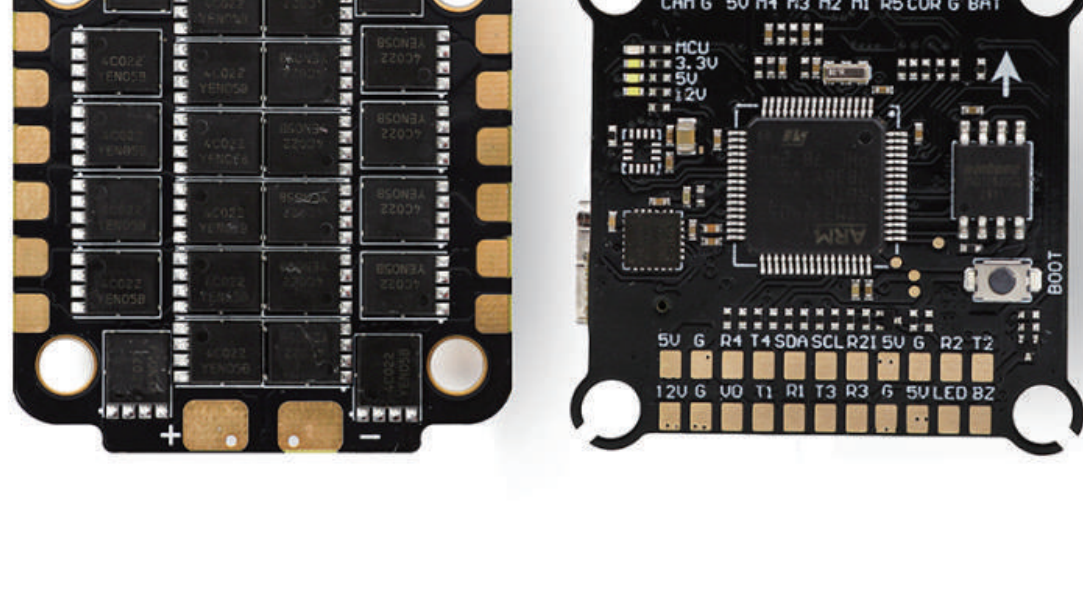

HGLRC SPECTER F450 STACK
instruction manual



产品参数

SPECTER F405 FC

MCU：STM32F405

GYRO：MPU6000

OSD：AT7456E

Blackbox：16MB

UART：5

BEC：10V2A/5V2.5A

FC Firmware：SPEDIXF405

Size：37mm*37mm*6mm

SPECTER 50A ESC

Constant Current:50A

Peak Current:60A (10s)


ESC Firmware:BL_S (F-H-40 16.7)

Size:40x40x6mm

HGLRC SPECTER F450 STACK
instruction manual




Interface definition

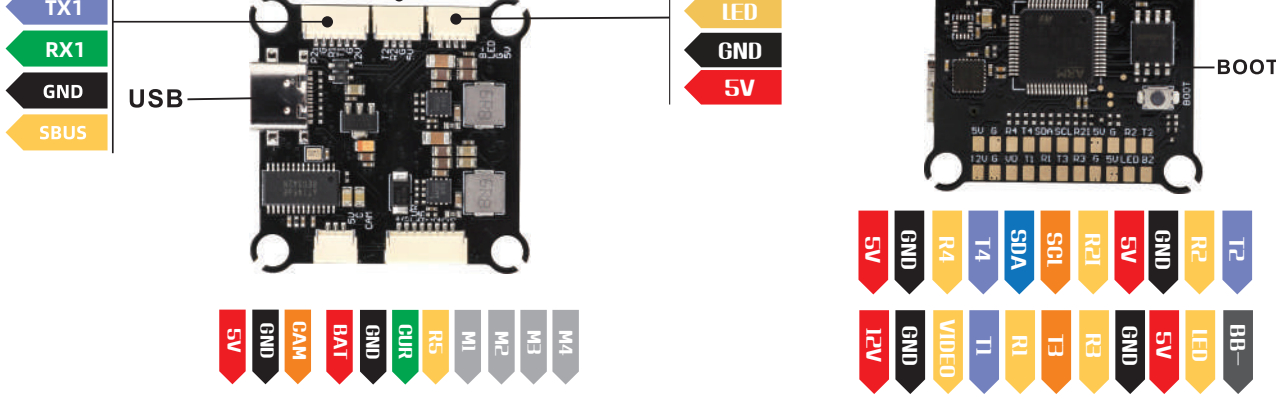

HGLRC SPECTER F450 STACK
instruction manual



Wiring diagram

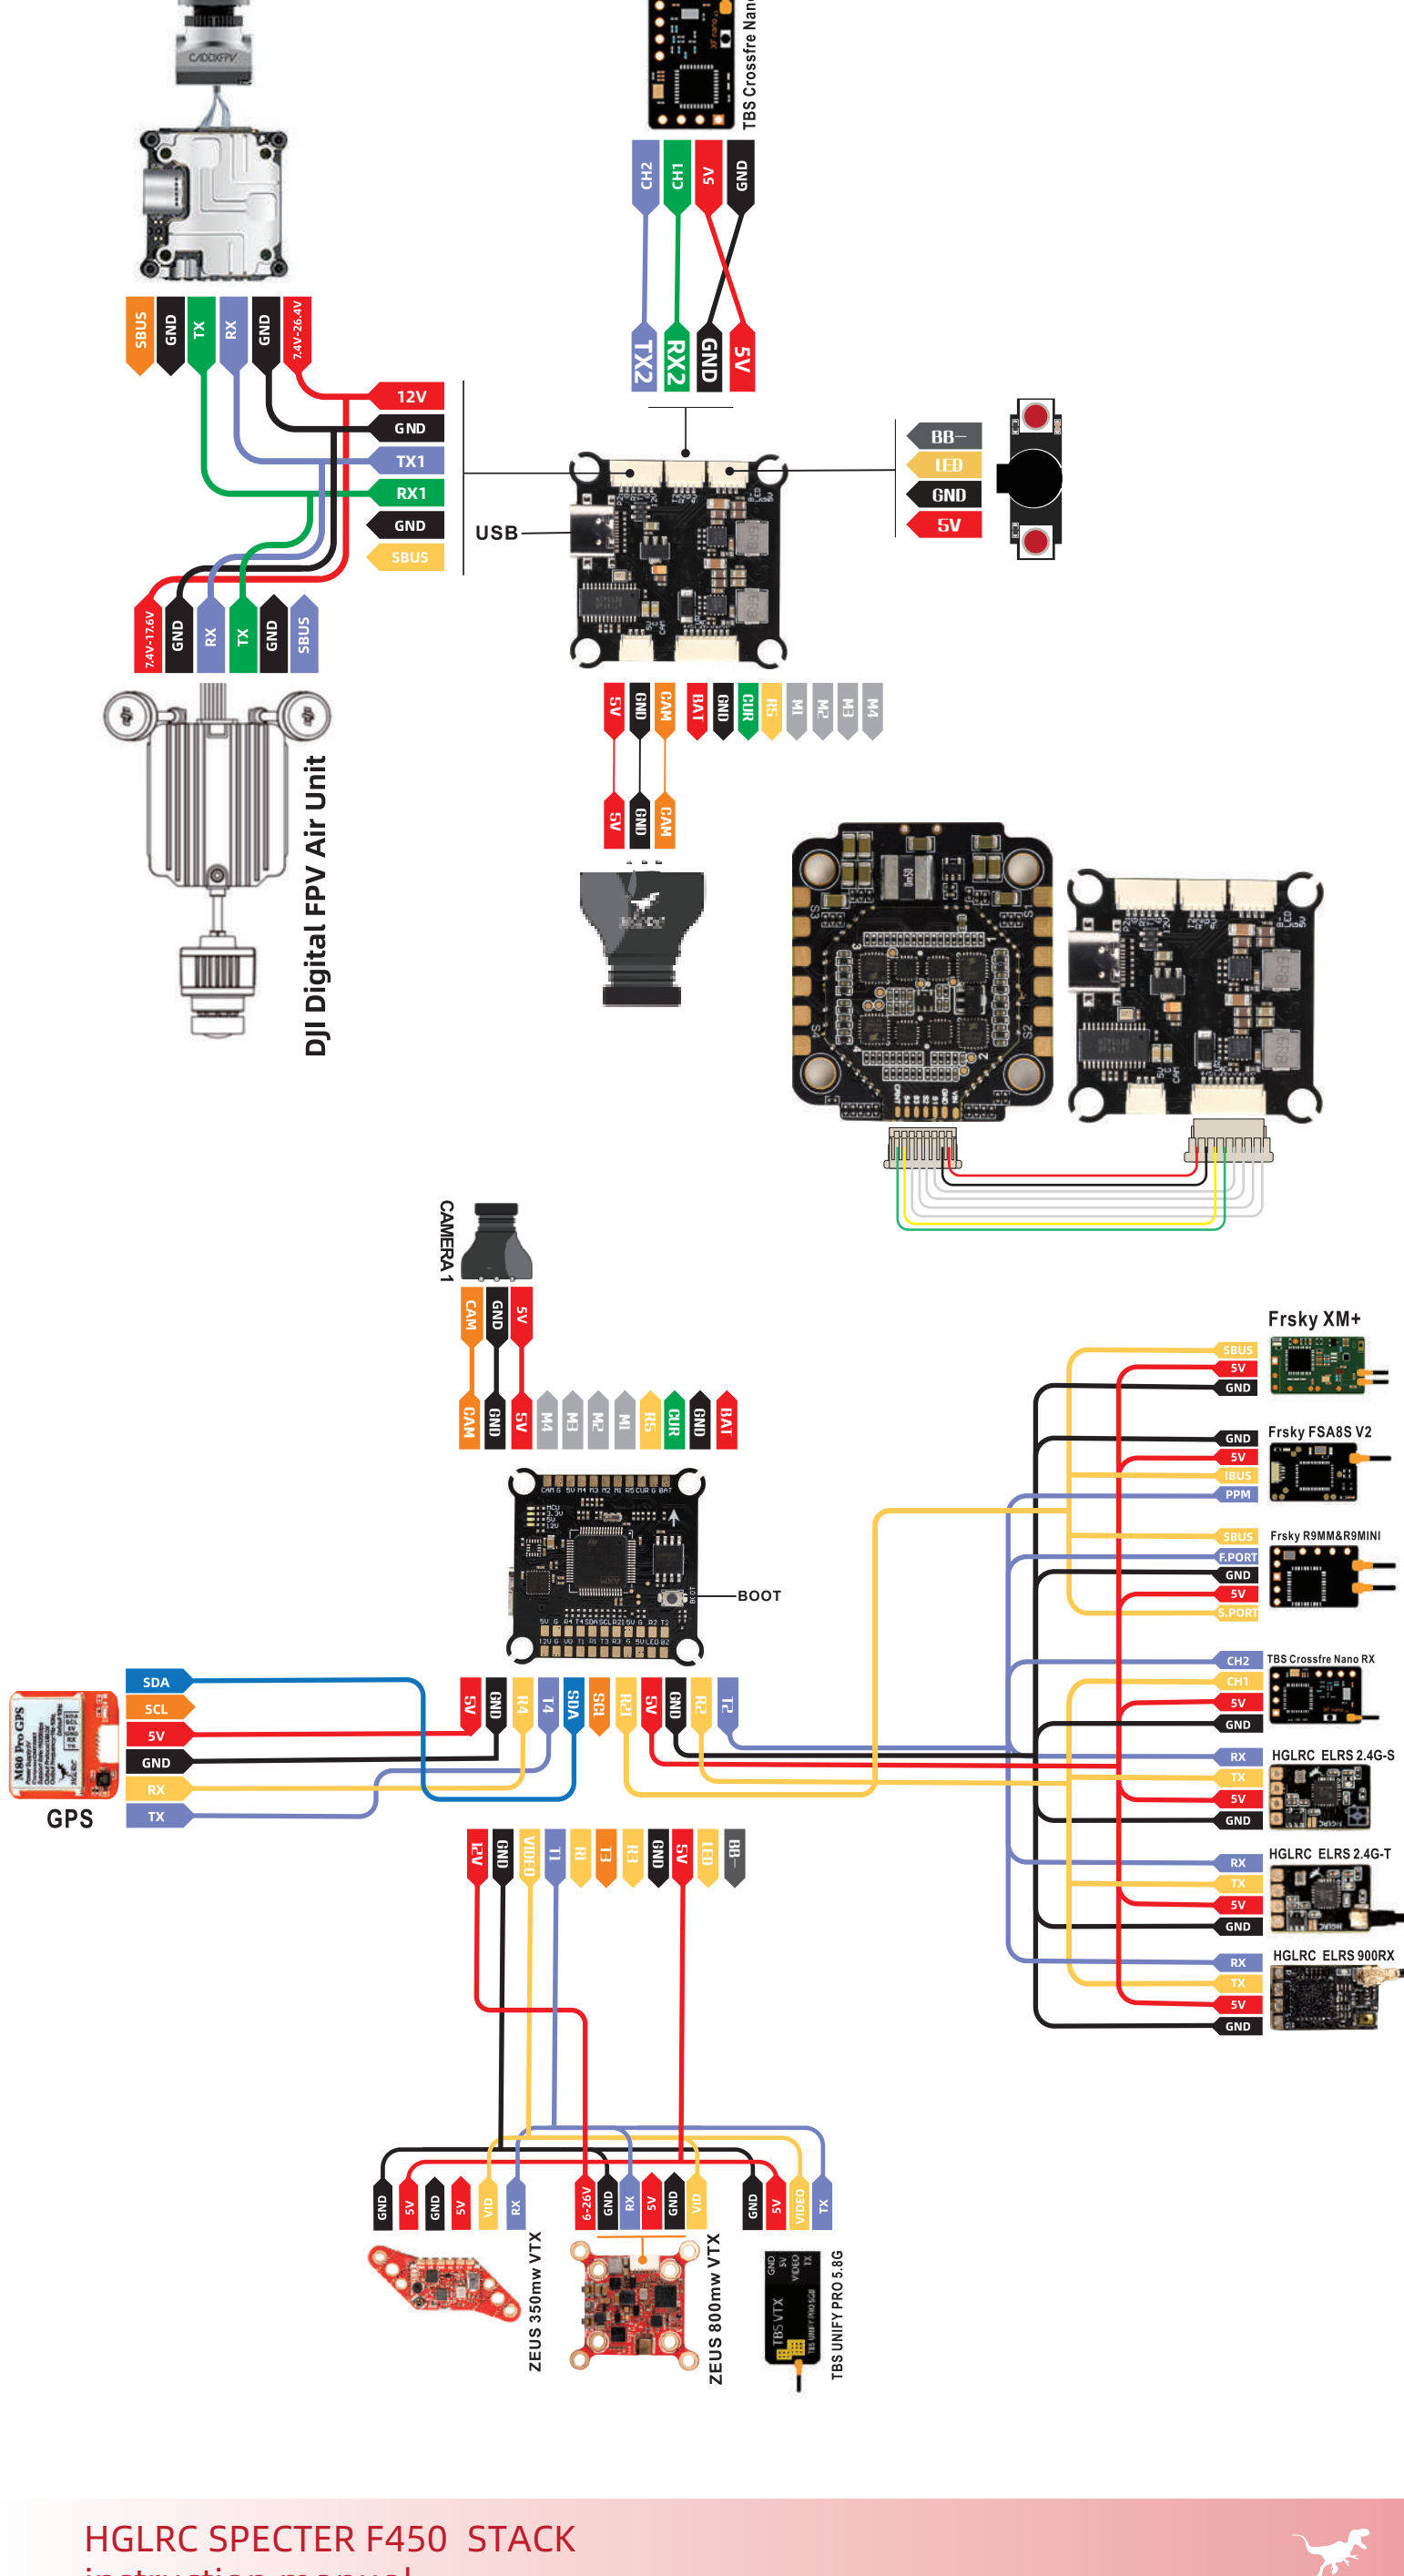

HGLRC SPECTER F450 STACK
instruction manual






About after-sales

1. If the product cannot be used normally after receiving the product, please consult the after-sales customer service or return to the factory for repair in time. If it is detected that it is a product problem, our company will provide free repair or replacement.
2. If the product is damaged due to improper operation, after inspection, repair service can be provided if it can be repaired.
3. Domestic customers, please contact the after-sales service personnel.
4. For overseas customers, please contact the after-sales service personnel on the official website.

Contact us

Sincerely thanks for everyone trust! Welcome to choose HGLRC products



Company name: Guangdong Huagulong Technology Co., Ltd.

After sales email: hglrc@support.com

Official website: www.hglrc.com